
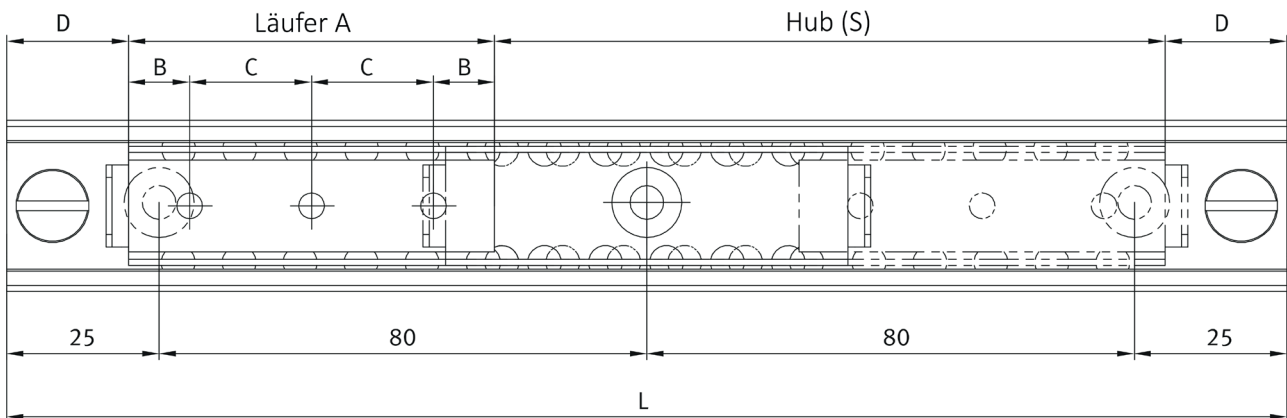
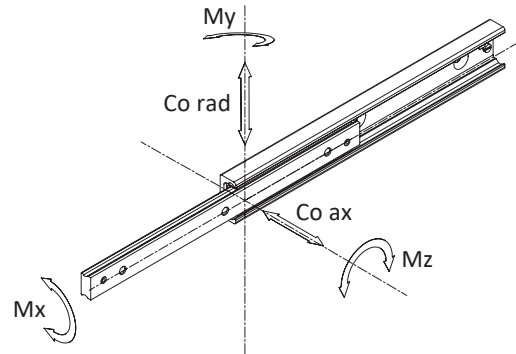


TLB Baugröße 28




Spezifikationen

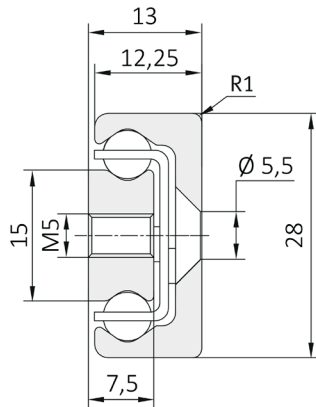

Bestellcode	Läufer										
	Abmessungen				Tragzahlen					C ₁₀₀ (N)	Montage- bohrung (St.)
	D (mm)	A (mm)	B (mm)	C (mm)	Co rad (N)	Co ax (N)	Mx (Nm)	My (Nm)	Mz (Nm)		
TLB28											
TLB28-60	20	60	10	20	3.481	2.438	17	25	36	3.481	3
TLB28-80	20	80	10	20	4.642	3.249	23	44	62	4.642	4
TLB28-130	20	130	25	80	7.542	5.279	36	115	162	7.542	2
TLB28-210	20	210	25	80	12.182	8.525	60	301	427	12.200	3
TLB28-290	20	290	25	80	16.850	11.775	83	570	812	16.823	4
TLB28-370	20	370	25	80	21.461	15.024	106	928	1.324	21.461	5
TLB28-450	20	450	25	80	26.103	18.272	128	1.372	1.965	26.103	6

TLB Baugröße 43

Spezifikationen

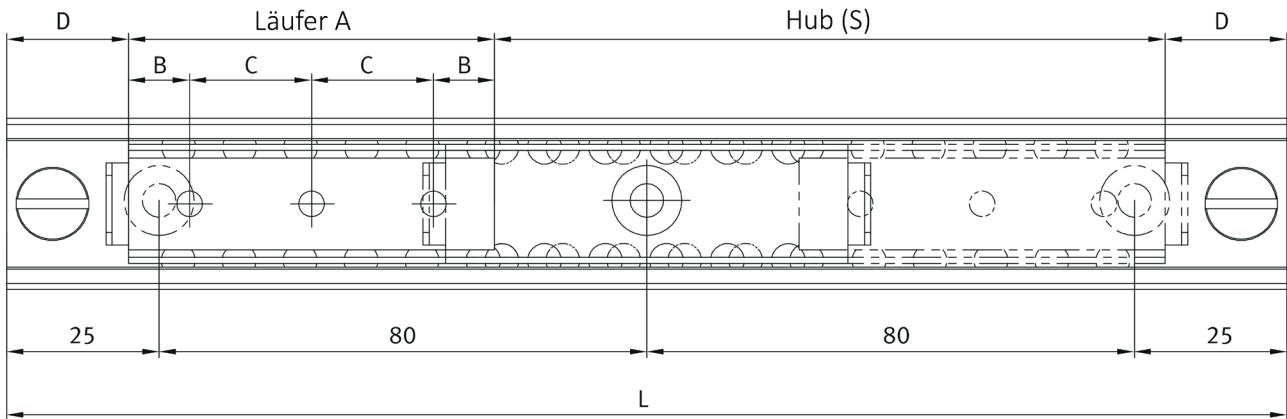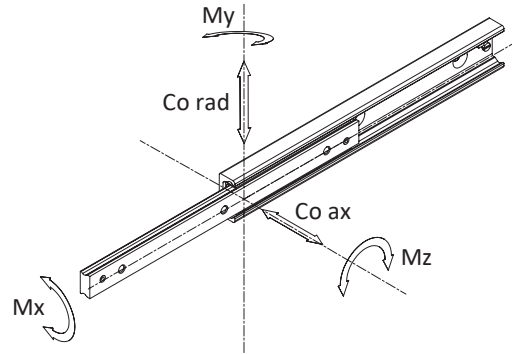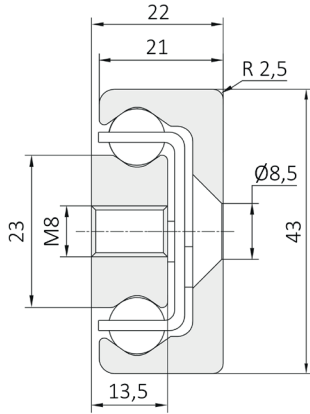

Bestellcode	Läufer										
	Abmessungen				Tragzahlen					C ₁₀₀ (N)	Montage- bohrung (St.)
	D (mm)	A (mm)	B (mm)	C (mm)	Co rad (N)	Co ax (N)	Mx (Nm)	My (Nm)	Mz (Nm)		
TLB43											
TLB43-130	25	130	25	80	13.912	9.738	97	212	302	13.912	2
TLB43-210	25	210	25	80	22.471	15.743	156	550	786	22.471	3
TLB43-290	25	290	25	80	31.032	21.723	215	1.060	1.503	31.032	4
TLB43-370	25	370	25	80	39.633	27.715	272	1.710	2.442	39.592	5
TLB43-450	25	450	25	80	48.151	33.704	333	2.528	3.612	48.151	6
TLB43-530	25	530	25	80	56.713	39.698	390	3.508	5.010	56.713	7
TLB43-610	25	610	25	80	65.272	45.689	451	4.646	6.637	65.272	8

TLB Baugröße 28 und 43 – Kombinationen

Bestellcode	Länge der Führung (mm)	Länge des Läufers (mm)	Hub (mm)
TLB28			
TLB28-130-60-30	130	60	30
TLB28-210-60-110	210	60	110
TLB28-290-60-190	290	60	190
TLB28-370-60-270	370	60	270
TLB28-450-60-350	450	60	350
TLB28-210-80-90	210	80	90
TLB28-290-80-170	290	80	170
TLB28-370-80-250	370	80	250
TLB28-450-80-330	450	80	330
TLB28-530-80-410	530	80	410
TLB28-610-80-490	610	80	490
TLB28-290-130-120	290	130	120
TLB28-370-130-200	370	130	200
TLB28-450-130-280	450	130	280
TLB28-530-130-360	530	130	360
TLB28-610-130-440	610	130	440
TLB28-690-130-520	690	130	520
TLB28-770-130-600	770	130	600
TLB28-850-130-680	850	130	680
TLB28-930-130-760	930	130	760
TLB28-1010-130-840	1010	130	840
TLB28-450-210-200	450	210	200
TLB28-530-210-280	530	210	280
TLB28-610-210-360	610	210	360
TLB28-690-210-440	690	210	440
TLB28-770-210-520	770	210	520
TLB28-850-210-600	850	210	600
TLB28-930-210-680	930	210	680
TLB28-1010-210-760	1.010	210	760
TLB28-1170-210-920	1.170	210	920
TLB28-1330-210-1080	1.330	210	1.080
TLB28-610-290-280	610	290	280
TLB28-690-290-360	690	290	360
TLB28-770-290-440	770	290	440
TLB28-850-290-520	850	290	520
TLB28-930-290-600	930	290	600
TLB28-1010-290-680	1.010	290	680
TLB28-1170-290-840	1.170	290	840
TLB28-1330-290-1000	1.330	290	1.000
TLB28-1490-290-1160	1.490	290	1.160
TLB28-770-370-360	770	370	360
TLB28-850-370-440	850	370	440
TLB28-930-370-520	930	370	520
TLB28-1010-370-600	1.010	370	600
TLB28-1170-370-760	1.170	370	760
TLB28-1330-370-920	1.330	370	920
TLB28-1490-370-1080	1.490	370	1.080
TLB28-930-450-440	930	450	440
TLB28-1010-450-520	1.010	450	520
TLB28-1170-450-680	1.170	450	680
TLB28-1330-450-840	1.330	450	840
TLB28-1490-450-1000	1.490	450	1.000
TLB28-1650-450-1160	1.650	450	1.160

Bestellcode	Länge der Führung (mm)	Länge des Läufers (mm)	Hub (mm)
TLB43			
TLB43-290-130-110	290	130	110
TLB43-370-130-190	370	130	190
TLB43-450-130-270	450	130	270
TLB43-530-130-350	530	130	350
TLB43-610-130-430	610	130	430
TLB43-690-130-510	690	130	510
TLB43-770-130-590	770	130	590
TLB43-850-130-670	850	130	670
TLB43-930-130-750	930	130	750
TLB43-1010-130-830	1.010	130	830
TLB43-450-210-190	450	210	190
TLB43-530-210-270	530	210	270
TLB43-610-210-350	610	210	350
TLB43-690-210-430	690	210	430
TLB43-770-210-510	770	210	510
TLB43-850-210-590	850	210	590
TLB43-930-210-670	930	210	670
TLB43-1010-210-750	1.010	210	750
TLB43-1170-210-910	1.170	210	910
TLB43-1330-210-1070	1.330	210	1.070
TLB43-1490-210-1230	1.490	210	1.230
TLB43-1650-210-1390	1.650	210	1.390
TLB43-610-290-270	610	290	270
TLB43-690-290-350	690	290	350
TLB43-770-290-430	770	290	430
TLB43-850-290-510	850	290	510
TLB43-930-290-590	930	290	590
TLB43-1010-290-670	1.010	290	670
TLB43-1170-290-830	1.170	290	830
TLB43-1330-290-990	1.330	290	990
TLB43-1490-290-1150	1.490	290	1.150
TLB43-1650-290-1310	1.650	290	1.310
TLB43-1810-290-1470	1.810	290	1.470
TLB43-770-370-350	770	370	350
TLB43-850-370-430	850	370	430
TLB43-930-370-510	930	370	510
TLB43-1010-370-590	1.010	370	590
TLB43-1170-370-750	1.170	370	750
TLB43-1330-370-910	1.330	370	910
TLB43-1490-370-1070	1.490	370	1.070
TLB43-1650-370-1230	1.650	370	1.230
TLB43-1810-370-1390	1.810	370	1.390
TLB43-930-450-430	930	450	430
TLB43-1010-450-510	1.010	450	510
TLB43-1170-450-670	1.170	450	670
TLB43-1330-450-830	1.330	450	830
TLB43-1490-450-990	1.490	450	990
TLB43-1650-450-1150	1.650	450	1.150
TLB43-1810-450-1310	1.810	450	1.310
TLB43-1970-450-1470	1.970	450	1.470
TLB43-1170-530-590	1.170	530	590
TLB43-1330-530-750	1.330	530	750
TLB43-1490-530-910	1.490	530	910
TLB43-1650-530-1070	1.650	530	1.070
TLB43-1810-530-1230	1.810	530	1.230
TLB43-1970-530-1390	1.970	530	1.390
TLB43-1330-610-670	1.330	610	670
TLB43-1490-610-830	1.490	610	830
TLB43-1650-610-990	1.650	610	990
TLB43-1810-610-1150	1.810	610	1.150
TLB43-1970-610-1310	1.970	610	1.310

SAIBO GmbH
Hans-Böckler-Straße 2
97447 Gerolzhofen
Tel.: +49 (0) 9382-2888981
www.saibo.de
post@saibo.de